



# Flex 3 Unit

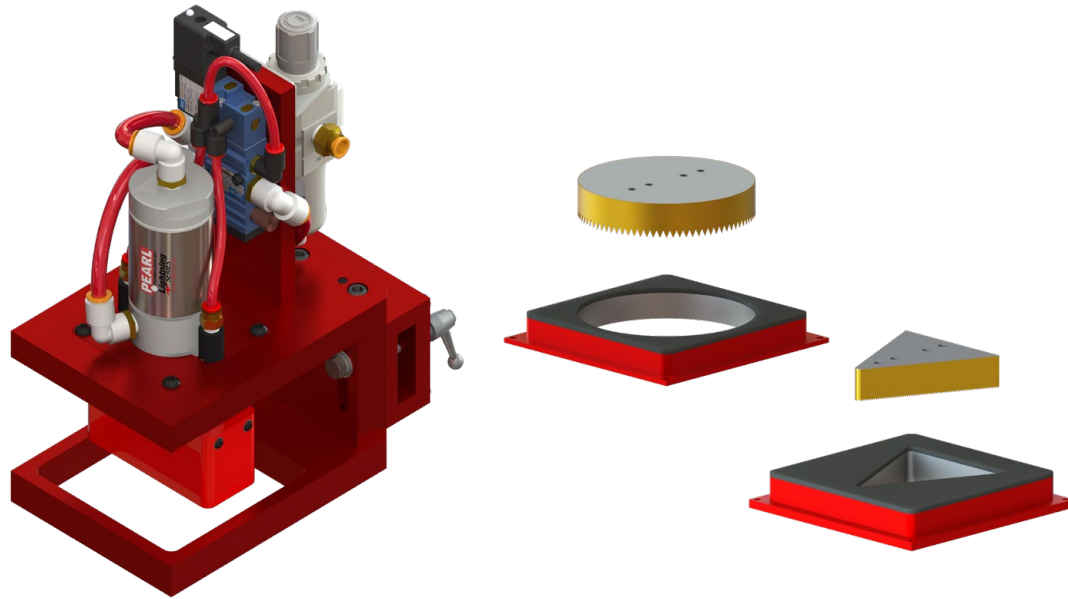


Pearl's Flex 3 unit is used primarily for handle hole punches of all shapes and sizes. The unit is designed with a single web clamp, allowing all of Pearl's standard HHO punches to work with the unit. Pearl offers cross rail and side rail units. The cross rail unit can punch holes as close as 5.5" center to center. The side rail unit has a throat depth of 3.875". Flexible for punch sizes up to a maximum of 3.5". Punch and die insert sold separately.

## Features:

- Position punches in MD or TD by rotating the inserts 90°
- Interchangeable punch and die sets allow for variety of shapes
- Simple and easy to install and maintain
- Versatile for increased cost savings
- Optional pivot mount assembly
- Optional slug tube removal
- Custom web clamps available
- Standard voltages: 110 VAC, 220 VAC, 24 VDC
- Custom sizes and designs available upon request

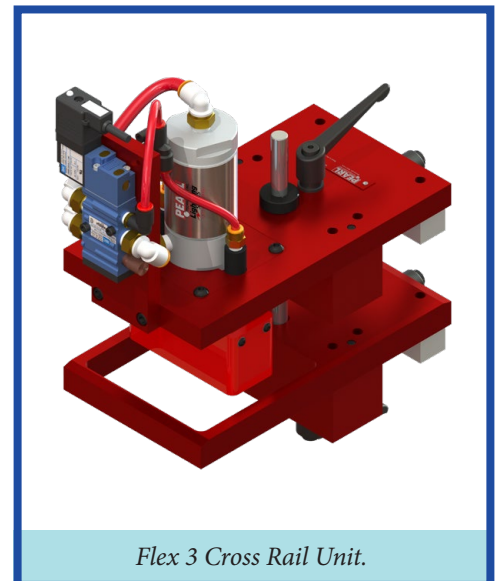

*Flex 3 Cross Rail Unit.*

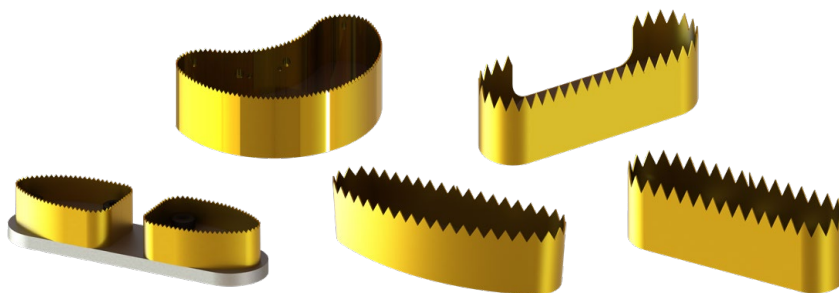

**Save Time. Save Money. Buy Pearl.**

315-365-3742 • sales@pearltechinc.com • www.pearltechinc.com

**PEARL**<sup>®</sup>  
TECHNOLOGIES INC.